



HORIZONTAL CLEAR OPENING

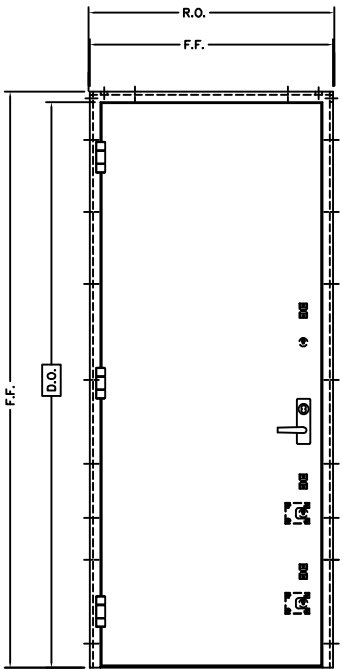

TYPICAL FRAME JAMB SECTION - WITH EMBED - 2X SCALE

HOP-2133F 60 MINUTE FE/BR OPAQUE FIRE DOOR

3	1	60MIN OP 800	SUBFRAME ASSEMBLY
2	1	60MIN OP 200	L-FRAME ASSEMBLY AND WELD
1	1	60MIN OP 100	DOOR ASSEMBLY AND WELD
ITEM	QTY.	PART NO.	DESCRIPTION

A.F.F. = ABOVE FINISHED FLOOR  
CUST. = CUSTOMER  
D.O. = DOOR OPENING  
EXT. = EXTERIOR  
F.F. = FINISHED FRAME  
INT. = INTERIOR  
LOC. = LOCATION  
No. = NUMBER  
P.O. = PURCHASE ORDER  
QTY. = QUANTITY  
R.O. = ROUGH OPENING  
V.O. = VISION OPENING  
WO. = WORK ORDER

HARDEN MODEL No. HOP-2133F  
DOS MODEL No. CDF-60R-HSP-01A

TOLERANCES:		HARDEN ARCHITECTURAL SECURITY PRODUCTS LLC. LANCASTER, PA 17601	
ANGULAR (DEG/MIN)	±0°30'	CUSTOMER	
LINEAR (FRAC)	±1/16		
LINEAR (DEC)	.X ±.06 .XX ±.03 .XXX ±.015		
DRAWN BY:	DATE:	TITLE	
CHECKED BY:	DATE:	HOP-2133F 60 MIN FE/BR / OPAQUE SINGLE FIRE DOOR	
ENGINEERED BY:	DATE:	SIZE	DWG. NO.
		SCALE	W.O. NO.
			SHEET