


TYPICAL FRAME JAMB SECTION - WITH EMBED - 2X SCALE

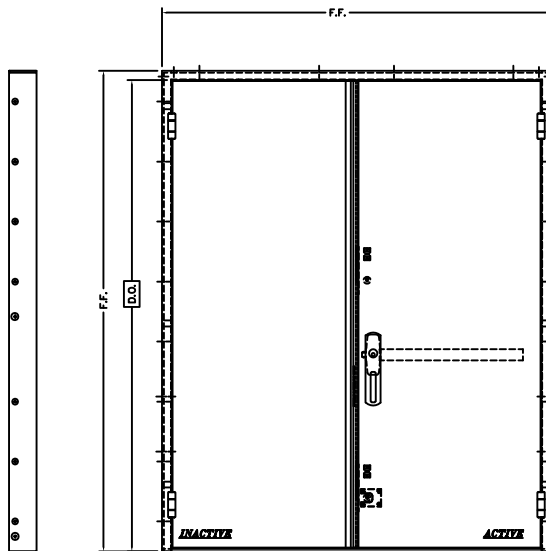

A.F.F. = ABOVE FINISHED FLOOR
 C.O. = CLEAR OPENING
 CUST. = CUSTOMER
 D.O. = DOOR OPENING
 EXT. = EXTERIOR
 F.F. = FINISHED FRAME
 INT. = INTERIOR
 LOC. = LOCATION
 No. = NUMBER
 PO. = PURCHASE ORDER
 QTY. = QUANTITY
 R.O. = ROUGH OPENING
 V.O. = VISION OPENING
 WO. = WORK ORDER

HARDEN MODEL No. DSDO-15R-X-01
DOS MODEL No. GDDO-15R-HSP-01A
GLAZING No. N/A

DSDO-15R 15 MINUTE FE/BR OPAQUE DOUBLE DOOR

4	1	15MIN DD OP 800	TUBE SUBFRAME ASSEMBLY AND WELD
3	1	15MIN DD OP 300	FRAME ASSEMBLY AND WELD
2	1	15MIN DD OP 200	INACTIVE LEAF ASSEMBLY
1	1	15MIN DD OP 100	ACTIVE LEAF ASSEMBLY
ITEM	QTY.	PART NO.	DESCRIPTION

TOLERANCES:		HARDEN ARCHITECTURAL SECURITY PRODUCTS LLC. LANCASTER, PA 17601	
ANGULAR (DEG/MIN)	±0°30'	CUSTOMER	
LINEAR (FRAC)	±1/16		
LINEAR (DEC)	±.06		
	.X ±.03		
	.XX ±.015		
	.XXX ±.015		
DRAWN BY:	DATE:	DSDO-15R 15 MINUTE FE/BR / OPAQUE DOUBLE DOOR	
CHECKED BY:	DATE:	SIZE	REV.
ENGINEERED BY:	DATE:	DWG. NO.	DSDO-15R CAD
		SCALE	W.O. NO.
			SHEET