



NOTE: WINDOW SHOWN
RECESSED INTO WALL.
WINDOW CAN BE
MOUNTED WITH FACE
OF FRAME FLUSH WITH
EXTERIOR OF WALL.


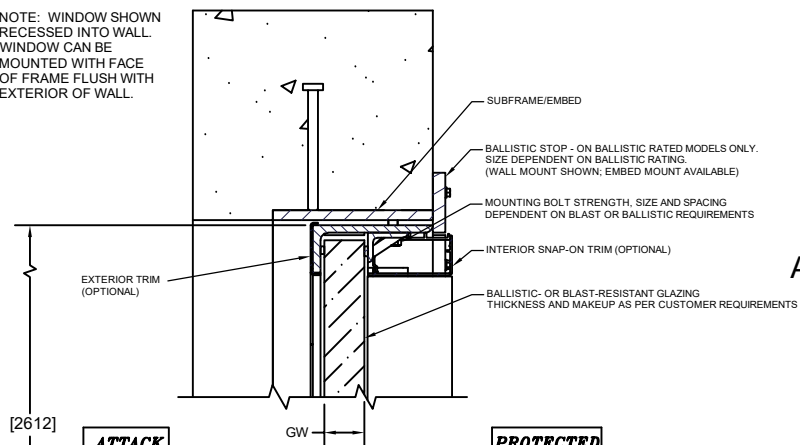


2612
**ATTACK
SIDE**

**PROTECTED
SIDE**

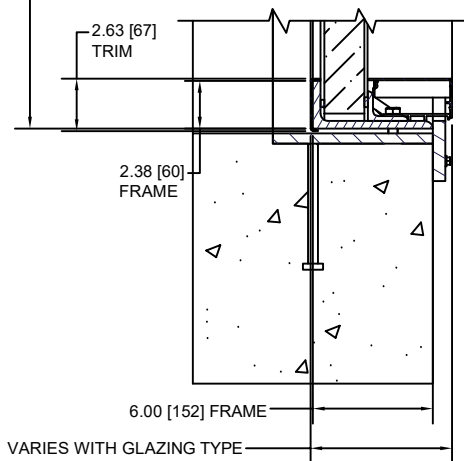

HEADER/SILL SECTION 5X SCALE

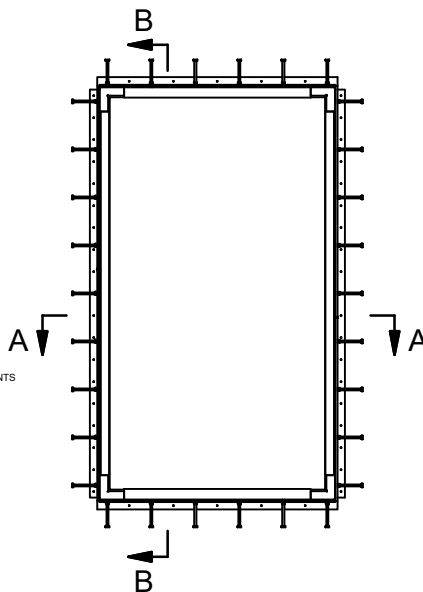

JAMB SECTION 5X SCALE

NOTES:
- SEALANT NOT SHOWN. CONSULT HARDEN
FOR SEALING PROCEDURES.
- FRAME BOLT SIZE AND SPACING PER
TESTED/CERTIFIED DESIGN AND/OR BLAST
REQUIREMENTS.
- PLATE SUBFRAME SHOWN, TUBE
SUBFRAMES AND OTHER MOUNTING
OPTIONS AVAILABLE.
- STANDARD INTERIOR AND EXTERIOR TRIM
SHOWN, OTHER OPTIONS AVAILABLE.
- GLAZING SIZES ARE FOR REFERENCE ONLY
AND MAY NOT BE REPRESENTATIVE OF
FINISHED PRODUCT.

A.F.F. = ABOVE FINISHED FLOOR
C.O. = CLEAR OPENING
CUST. = CUSTOMER
D.O. = DOOR OPENING
EXT. = EXTERIOR
F.F. = FINISHED FRAME
INT. = INTERIOR
LOC. = LOCATION
No. = NUMBER
P.O. = PURCHASE ORDER
QTY. = QUANTITY
R.O. = ROUGH OPENING
V.O. = VISION OPENING
WO. = WORK ORDER

GLAZING OPTIONS		
MODEL	BALLISTIC RATING	TYP. GLAZING WIDTH (GW)
WSFV-N-BU5	UL 752 LEVEL 5	1.24"
WSFV-N-BU8	UL 752 LEVEL 8	2.35"
WSFV-N-BN3	NIJ III	1.34"
WSFV-N-B39	7.62 X 39	VARIES
WSFV-N-EX	N/A - BLAST ONLY	VARIES

TOLERANCES:

ANGULAR (DEG/MIN)	±0°30'
LINEAR (FRAC)	±1/16
LINEAR (DEC)	±.06
	XX ±.03
	.XXX ±.015

DRAWN BY:

DATE:

CHECKED BY:

DATE:

ENGINEERED BY:

DATE:

**HARDEN ARCHITECTURAL
SECURITY PRODUCTS LLC.
LANCASTER, PA 17601**

CUSTOMER

TITLE

WSFV-N BLAST-BALLISTIC STEEL WINDOW

SIZE

DWG. NO.

WSFV-N CAD

REV.

SCALE

W.O. NO.

SHEET