


NOTES:

- SEALANT NOT SHOWN. CONSULT HARDEN FOR SEALANT PROCEDURES.
- FRAME BOLT SIZE AND SPACING AS PER CERTIFIED DESIGN.
- PLATE SUBFRAME SHOWN, TUBE SUBFRAMES AND OTHER MOUNTING OPTIONS AVAILABLE.
- STANDARD 15 MINUTE FE/BR GLAZING SHOWN, OTHER OPTIONS AVAILABLE.
- STANDARD INTERIOR AND EXTERIOR TRIM SHOWN, OTHER OPTIONS AVAILABLE.

A.F.F.	= ABOVE FINISHED FLOOR
C.O.	= CLEAR OPENING
CUST.	= CUSTOMER
D.O.	= DOOR OPENING
EXT.	= EXTERIOR
F.F.	= FINISHED FRAME
INT.	= INTERIOR
LOC.	= LOCATION
No.	= NUMBER
P.O.	= PURCHASE ORDER
QTY.	= QUANTITY
R.O.	= ROUGH OPENING
V.O.	= VISION OPENING
W.O.	= WORK ORDER

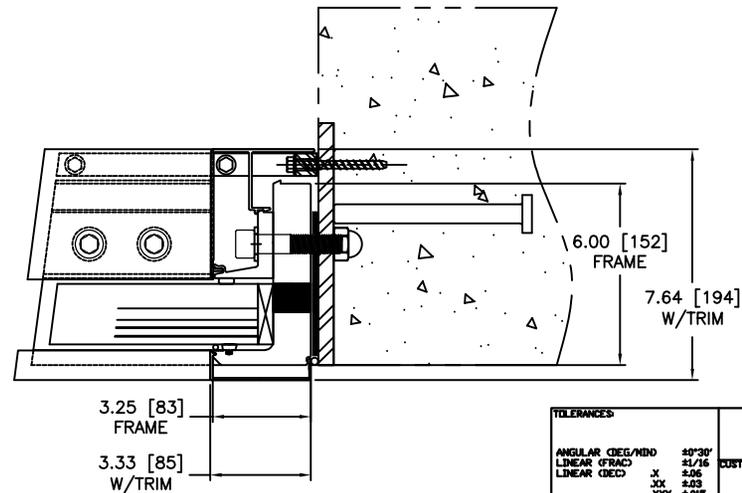

TOLERANCES:		HARDEN ARCHITECTURAL SECURITY PRODUCTS LLC. LANCASTER, PA 17601	
ANGULAR DEC/MNO	±0°30'	CUSTOMER	
LINEAR GRAC	±1/16"	TITLE	
LINEAR DEC	X ±.05	WAFV-15R 15 MIN. FE/BR ALUM. WINDOW CAD DETAILS	
	XX ±.03	SIZE	
	XXX ±.015	SCALE	
DRAWN BY:	DATE:	DWG. NO.	REV.
CHECKED BY:	DATE:	WAFV-15R CAD	
ENGINEERED BY:	DATE:	SCALE	SHEET