
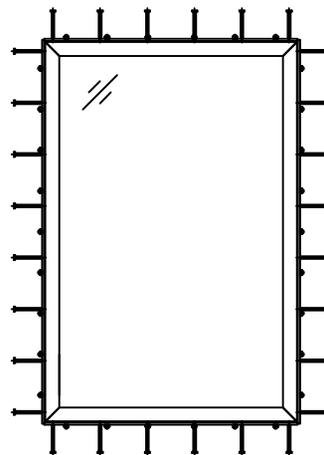



F.F.

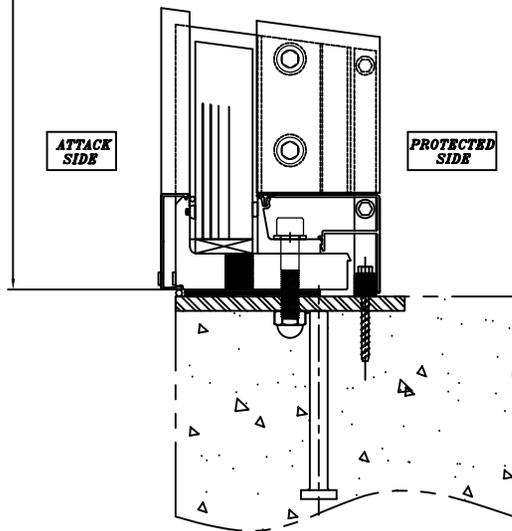

- NOTES:
- SEALANT NOT SHOWN. CONSULT HARDEN FOR SEALANT PROCEDURES.
  - FRAME BOLT SIZE AND SPACING AS PER CERTIFIED DESIGN.
  - PLATE SUBFRAME SHOWN, TUBE SUBFRAMES AND OTHER MOUNTING OPTIONS AVAILABLE.
  - STANDARD INTERIOR AND EXTERIOR TRIM SHOWN, OTHER OPTIONS AVAILABLE.
  - GLAZING SIZES ARE FOR REFERENCE ONLY AND MAY NOT BE REPRESENTATIVE OF FINISHED PRODUCT

GLAZING OPTIONS		
MODEL	BALLISTIC RATING	TYPICAL GLAZING WIDTH (GW) UNINSULATED
WAFV-N-BU5	UL 752 LEVEL 5	1.24"
WAFV-N-BU8	UL 752 LEVEL 8	2.35"
WAFV-N-BN3	NIJ III	1.34"
WAFV-N-B39	7.62 X 39	VARIES
WAFV-N-EX	N/A - BLAST ONLY	VARIES

- A.F.F. = ABOVE FINISHED FLOOR  
 C.O. = CLEAR OPENING  
 CUST. = CUSTOMER  
 D.O. = DOOR OPENING  
 EXT. = EXTERIOR  
 F.F. = FINISHED FRAME  
 INT. = INTERIOR  
 L.O.C. = LOCATION  
 No. = NUMBER  
 P.O. = PURCHASE ORDER  
 QTY. = QUANTITY  
 R.O. = ROUGH OPENING  
 V.O. = VISION OPENING  
 W.O. = WORK ORDER

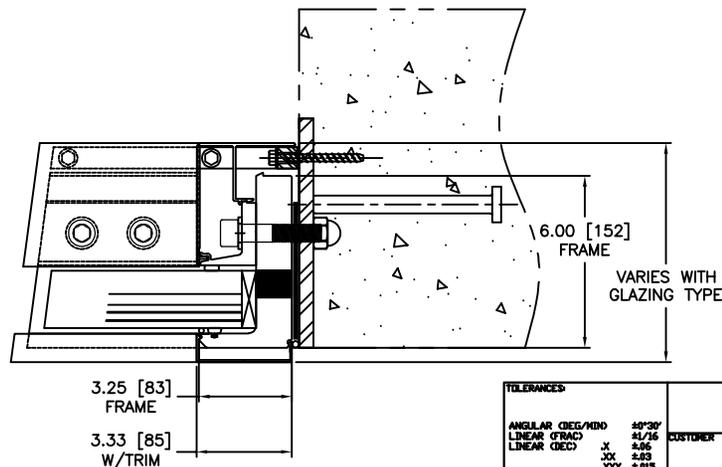

TOLERANCES		HARDEN ARCHITECTURAL SECURITY PRODUCTS LLC. LANCASTER, PA 17601	
ANGULAR (DEG/100)	±0°30'	CUSTOMER	
LINEAR (FRAC)	±.06	TITLE	
LINEAR (DEC)	.X	WAFV-N BLAST-BALLISTIC ALUM. WINDOW CAD DETAILS	
	.XX	SIZE	DWG. NO.
	.XXX	SCALE	WAFV-N CAD
	.XXX	SHEET	REV.
DRAWN BY:	DATE:		
CHECKED BY:	DATE:		
ENGINEERED BY:	DATE:		